



GPON ONU

1GE

& 网络管理



High Speed CPU



Low Power Consumption



Optional Shell Supply



Software Customization

Brief Views


FD 11G-G-F 0 data type ONU is one of the GPON optical network unit design to meet the requirement of the broadband access network. It applies in FTTH/FTTO to provide the data, video service based on the GPON network.

FD 11G-G-F 0 features high-performance forwarding capabilities to ensure excellent experience with Internet and HD video services. It has good third-party compatibility to work with the third party OLT, such as Huawei/ZTE/Fiberhome/Alcatel-Lucent. It provides a perfect terminal solution and future-oriented service supporting capabilities for FTTH deployment.

Functional Feature

- In compliant with ITU - T G. 984.4 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support multiple registration methods
- Support port VLAN configuration
- Support mac-address learning
- Support port-based rate limitation and bandwidth control
- Support port flow-control
- Support broadcasting storm resistance function
- Support igmp transparent/snooping/proxy mode
- Support Dynamic Bandwidth Allocation (DBA)
- Support three layer routing function
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection

Product Interface and LED

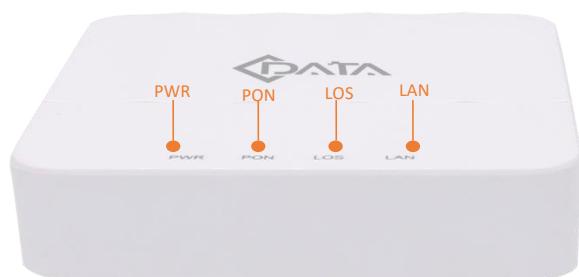

LED Definitions

Indicator		Description
PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;
PON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off: Failed to register to OLT or no normal optical signal input;
LOS	GPON optical signals	On: Optical power lower than receiver sensitivity; Off: Optical in normal;
LAN	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;

Hardware

● GPON Port

- Single mode single fiber
- GPON: FSAN G. 4.2 standard, Class B
- GPON: 2.4 Gbps/1.244Gbps downstream/upstream
- Wavelength :
Transmit: 1310nm Receiver: 14 0nm
- Receiving sensitivity :
GPON: -2 dBm
- Saturated power :
GPON: - dBm
- Transmitting power :
GPON: 0. ~ dBm

● User Port(LAN)

- 1*10/100/1000M Auto-negotiation RJ4 ports
- Full Duplex / Half-Duplex
- RJ4 , Auto-MDI/MDI-X
- Transmission Distance 100 Meter

● Indicators

- PWR / PON / LOS / LAN

● Power

- External 12V/0. A DC power supply adapter

- Power consumption: 3W

● Dimension and Weight

- Item Dimension:

- mm(L) x mm(W) x23. mm (H)

- Item weight: about 2. g

● Environmental Specifications

- Operating temperature: 0 to 40°C

- Operating humidity: 10 to 0 (Non-condensing)

Software

● Management

- GPON:OMCI / WEB / TR0 / Telnet

● Register

- Auto-discovery/Link detection/Remote upgrade software

- Auto/MAC/SN/LOID Password authentication

● L3

- IPv4/IPv Dual Stack

- NAT

- DHCP client/server

- PPPOE client/ Pass through

- Static and dynamic routing

● Switch

- MAC address learning

- MAC address learning account limit

- Port isolation

- Port flow control

- Broadcast storm suppression

- VLAN transparent/tag/translate/trunk

● Multicast

- IGMP V2

- IGMP VLAN

- IGMP transparent/Snooping/Proxy

● Security

- Firewall

- MAC address/URL filter

- Remote WEB/Telnet access control

Application

- Typical Solution: FTTH
- Typical Business: Internet

